



Swivel Hoist Ring 8-231

Product information



- Rotates through 360° and pivot 180°, and simultaneously allows lifting from any direction.
- Manufactured from forged alloy steel, quenched and tempered.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolt are Metric thread (ASME / ANSI B18.3.1M).
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

Features: Built-in RFID/NFC chip

Material: Forged alloy steel, quenched and tempered

Marking: According to standard, CE-marked, WLL, size, steel quality, manufacturer ID and traceability

Temperature range: -40° up to +200°C (without reduction in WLL).

Finish: Painted


Standard: EN 1677-1

Safety factor: 4:1

Part Code	WLL ton	Thread mm	Torque Nm	Pitch DIN13	A mm	B mm	C mm	D mm	F mm	G mm	R mm	SW mm	I mm	E mm	M mm	Weight kg
NS8PKL10	1	M 12	100	1,75	33	39	31	11	80	58	17	19	44	20	M 12	0.3
NS8PKL15	1.5	M 14	120	2	50	56	45	17	116	90	27	22	63	21	M 14	0.9
NS8PKL20	2	M 16	150	2	50	54	46	17	116	90	27	24	63	24	M 16	0.9
NS8PKL25	2.5	M 18	200	2,5	65	77	57	20	155	108	34	30	86	26	M 18	1.9
NS8PKL30	3	M 20	250	2,5	51	52	49	17	116	90	27	30	63	30	M 20	1
NS8PKL50	5	M 24	400	3	72	81	59	25	163	126	37	36	88	36	M 24	2.6
NS8PKL56	5.6	M 27	400	3	87	96	79	30	204	148	46	41	110	38	M 27	4.9
NS8PKL78	7.8	M 30	500	3,5	87	94	81	30	204	148	46	46	110	48	M 30	5
NS8PKL125	12.5	M 36	1,000	4	110	112	98	36	248	188	57	55	128	54	M 36	9.6

Technical data

Kind of attachment

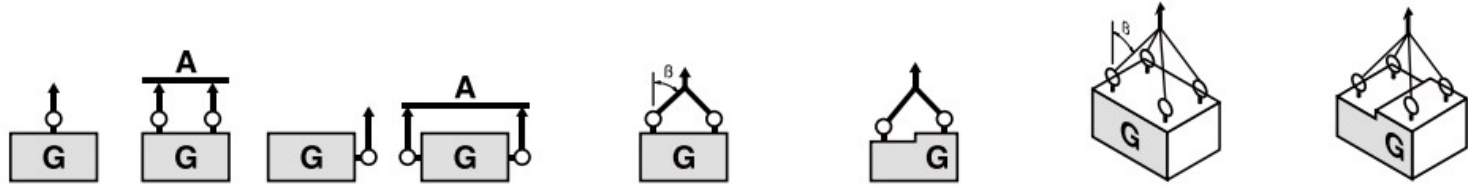

		1	2	1	2	2	2	2	3-4	3-4	3-4
Number of legs		1	2	1	2	2	2	2	3-4	3-4	3-4
Load direction		0°	0°	90°	90°	0-45°	45°- 60°	unsymm.	0 - 45°	45°- 60°	unsymm.
Item No.	Thread	WLL(t)									
8-231-005	M 8	0.8	1.6	0.5	1.0	0.7	0.5	0.5	1.10	0.80	0.5
8-231-007	M 10	1.2	2.4	0.7	1.4	1.0	0.7	0.7	1.50	1.10	0.7
8-231-010	M 12	1.5	3.0	1.0	2.0	1.4	1.0	1.0	2.10	1.50	1.0
8-231-015	M 14	2.4	4.8	1.5	3.0	2.1	1.5	1.5	3.20	2.30	1.5
8-231-020	M 16	3.2	6.4	2.0	4.0	2.8	2.0	2.0	4.20	3.00	2.0
8-231-025	M 18	5.0	10.0	2.5	5.0	3.5	2.5	2.5	5.30	3.80	2.5
8-231-030	M 20	4.5	9.0	3.0	6.0	4.2	3.0	3.0	6.30	4.50	3.0
8-231-050	M 24	9.0	18.0	5.0	10.0	7.0	5.0	5.0	10.50	7.50	5.0
8-231-056	M 27	9.5	19.0	5.6	11.2	7.8	5.6	5.6	11.80	8.40	5.6
8-231-078	M 30	12.0	24.0	7.8	15.6	10.9	7.8	7.8	16.40	11.70	7.8
8-231-080	M36	13.0	26.0	8.0	16.0	11.2	8.0	8.0	16.80	12.00	8.0
8-231-100	M36	13.0	26.0	10.0	20.0	14.0	10.0	10.0	21.00	15.00	10.0
8-231-125	M 36	14.0	28.0	12.5	25.0	17.5	12.5	12.5	26.30	18.80	12.5
8-231-156	M 42	16.0	32.0	15.6	31.2	21.8	15.6	15.6	32.80	23.40	15.6
8-231-200	M 48	20.0	40.0	20.0	40.0	28.0	20.0	20.0	42.00	30.00	20.0
8-231-220	M 56	22.0	44.0	22.0	44.0	30.8	22.0	22.0	46.20	33.00	22.0
8-231-225	M 64	22.5	45.0	22.5	45.0	31.5	22.5	22.5	47.25	33.75	22.5

Blueprint

